

Precision Pressure Transducer – Ruggedized PPTR

Honeywell's PPTR offers a rugged, smart pressure transducer for use in harsh environments. It combines proven silicon sensor technology with microprocessor-based signal conditioning to provide an extremely smart pressure transducer. Designed with a hermetically sealed, stainless steel construction, the PPTR operates in severe vibration, thermal and mechanical shock environments. The PPTR has many software features that support a wide range of applications.

APPLICATIONS:

- Engine Test Stands
- Flight Testing
- Water Depth
- Unmanned Underwater Vehicles
- Instrumentation and Analytical Equipment
- Process Control
- Research and Development

±0.10%
Accuracy from
-40 to 85°C



Hermetically
Sealed

Digital and
Analog

CE Qualified

ISO-9001
ISO-14001

FEATURES AND BENEFITS

- ▶ **High Accuracy**
±0.10% FS typical accuracy from -40 to 85°C
- ▶ **Smart, Digital Sensing and Control**
- ▶ **Versatile and Configurable**
- ▶ **User Selectable Software Features**
- ▶ **Simplifies System Design** - No additional signal compensation needed to gain the benefits of a very accurate sensor.
- ▶ **Efficient Data Acquisition** - Connect up to 89 units on a multidrop bus using built-in RS-485 capability.
Easy Interface - Directly connects to PC via communication ports.
Closes the Loop - Smart PPTR makes control decisions.
- ▶ **Works with existing and new systems.** - All units have 0-5V analog and either RS-232 or RS-485 digital outputs.
Isolation diaphragms handle most media - harsh gases or liquids.
Rugged Design - Operates in severe vibration, thermal, and mechanical shock environments.
Optimizes Output - User-configurable pressure units, sampling, update rate.
Flags Problems - Internal diagnostics set flags, provide alarms.
- ▶ Baud Rate, Parity Setting, Continuous Broadcast, ASCII or Binary Output, Sensor Temperature Output (°C or °F), Deadband, Sensitivity, Tare Value, Configurable Analog Output

PPTR

SPECIFICATIONS

Performance Specifications⁽¹⁾

Accuracy: (from -40 to 85°C)
 Digital: ±0.10% FS Typ., ±0.20% FS Max.⁽²⁾
 Analog: ±0.12% FS Typ., ±0.24% FS Max.⁽²⁾
 Temperature: ±1°C (at sensing element)
Temperature Range:
 Operating -40 to 85°C (-40 to 185°F)
 Storage: -55 to 90°C (-67 to 194°F)
Sample Rate⁽⁶⁾: 8.33ms to 51.2 min
Resolution:
 Digital: Up to 0.0011% FS
 Analog: 1.22mV steps (12 bits)
Response Delay:
 (1000/update rate) +1ms, minimum 17ms

Mechanical Specifications

Pressure Ranges and Type:
 See Ordering Information
Pressure Units⁽³⁾: atm, bar, cmwc, ftwc, hPa, inHg, inwc, kg/cm², KPa, mBar, mmHg, MPa, mwc, psi, user, lcom, pfs
Media Compatibility: Suitable for media compatible with 316 stainless steel (Consult factory for Hastelloy diaphragm.)
Weight: 14 oz. (397 gm) 6-pin connector
 22 oz. (624 gm) NPT w/pigtail style

Electrical Specifications


Output:
 RS-232 Digital w/0-5V Analog⁽⁵⁾
 RS-485 Digital w/0-5V Analog⁽⁵⁾
Power Requirements:
 Supply Voltage: 6 to 30 VDC
 Operating Current: 19-27mA
Baud Rate⁽⁶⁾: 1200, 2400, 4800, 9600, 14400, 19200, 28800
Bus Addressing⁽⁶⁾: Address up to 89 units

Environmental Features⁽³⁾⁽⁴⁾

Overpressure: 3x FS, maximum 6000psi
Burst Pressure: 3x FS, maximum 8500psi
Mechanical Shock: 1500g, 0.5ms half sine
Temp Shock: 24 1-hour cycles, -40 to 85°C
Vibration: 0.5in or 20G's, 20Hz – 2K Hz

(1) Accuracy is the sum of worst case linearity, repeatability, hysteresis, thermal effects and calibration errors from -40 to 85°C. Typical is the average of absolute value of errors at all pressures and temperatures. Calibration is traceable to NIST. (2) Tighter accuracy available on some models. Consult factory. (3) Exposure to overpressure will not permanently affect calibration or accuracy of unit. Exceeding burst pressure may result in media escape. Mechanical Shock tested per MIL-STD-883D, M2002.3, Cond. B. Vibration tested per MIL-STD-883D, M2007.2, Cond. A. (4) CE Mark per IEC 61326. See www.ssec.honeywell.com/pressure/datasheets.html for information on test levels and results. Connector MIL-C-26482, Shell Size #10, 6-pin #20 size. (5) User configurable. (6) Demonstration kit includes unit, power supply/data cable (120V), demonstration software, and user manual.

CASE OUTLINE

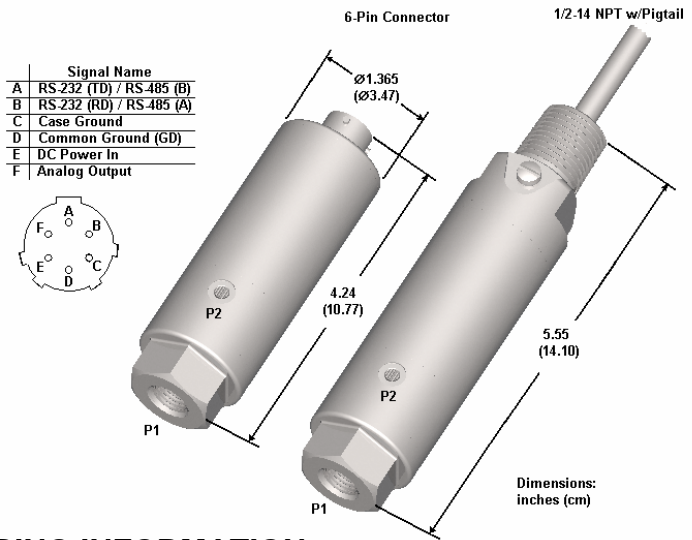

ORDERING INFORMATION

PPTR Precision Pressure Transducer - Ruggedized

FULL SCALE PRESSURE RANGE

	Absolute	Gauge
0015	15 PSI	n/a
0020	20 PSI	20 PSI
0040	40 PSI	40 PSI
0100	100 PSI	100 PSI
0300	300 PSI	300 PSI
0500	500 PSI	500 PSI
1000	1000 PSI	1000 PSI
1500	1500 PSI	1500 PSI
3000	3000 PSI	3000 PSI

TYPE	P1 Pressure	P2 Pressure
A Absolute	0(vacuum) to FS	N/A
G Gauge	Reference to FS	Reference

P1 PRESSURE CONNECTION

P ¼ - 18 NPT (internal)

OUTPUTS

2V RS-232 digital, 0-5V analog
 5V RS-485 digital, 0-5V analog


ELECTRICAL CONFIGURATION AND CONNECTION

B 6-pin connector⁽⁴⁾
 D ½ - 14 NPT external w/4ft pigtail cable

OPTIONS

A Demonstration Kit⁽⁶⁾ (RS-232 only)
 B Mating Connector – for 6-pin connector version
 C Power Supply/Data Cable – for 6-pin connector version (RS-232 only)

PPTR 0500 A P 2V B -A

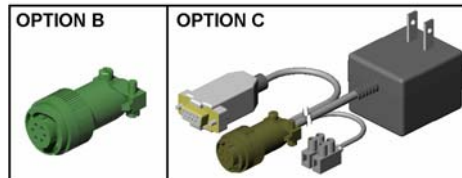

Find out more

For more information on Honeywell's Precision Pressure Transducers visit us online at www.pressuresensing.com or contact us at 800-323-8295 or 763-954-2474. Customer Service Email: ssec.customer.service@honeywell.com.

Honeywell reserves the right to make changes to improve reliability, function or design. Honeywell does not assume any liability arising out of the application or use of any product or circuit described herein; neither does it convey any license under its patent rights nor the rights of others. Covered by one or more of the following US Patents: 4,918,992, 4,788,521 and 5,948,988.

Honeywell
 12001 Highway 55
 Plymouth, MN 55441
 Tel: 800-323-8295
www.honeywell.com/pressuresensing

Form #900132
 May 2006
 ©2006 Honeywell International Inc.

Honeywell